


重载弯板输送链

HEAVY DUTY CRANKED LINK TRANSMISSION CHAIN

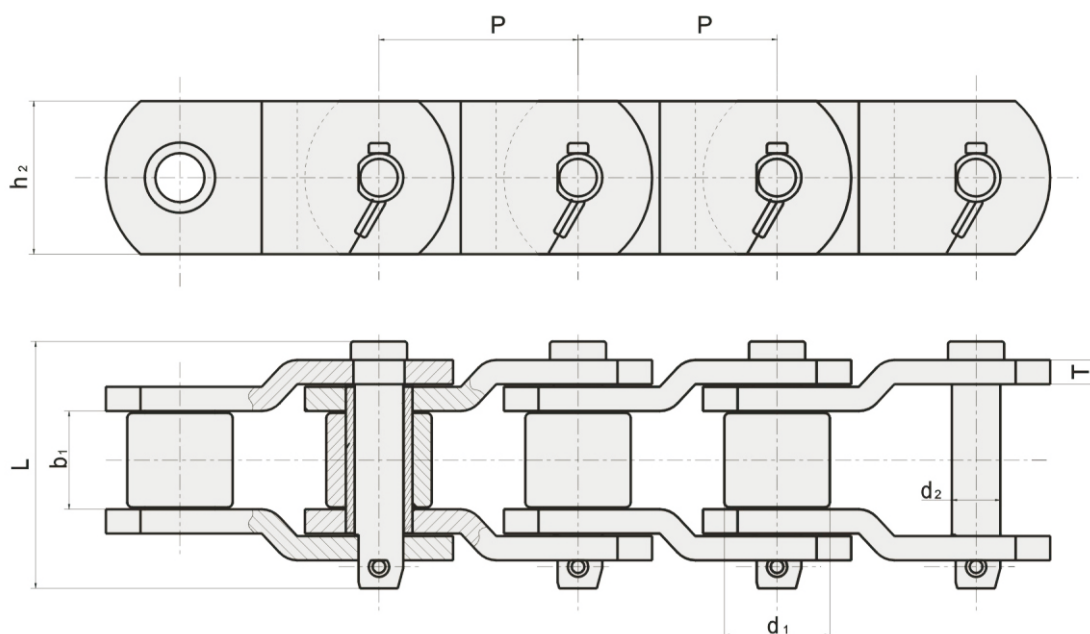

YHK Chain No.	节距 Pitch	滚子直径 Roller diameter	窄端内宽 Width between narrow side	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁	d ₂ max	L max	h ₂ max	T	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
2010	63.50	31.75	38.10	15.90	90.7	47.8	7.9	250.0	270.0	14.00
2510	78.10	31.75	36.90	16.00	94.8	40.0	8.0	271.0	292.0	10.72
2512(MXS3011)	77.90	41.28	39.60	19.05	100.0	57.0	9.7	340.0	367.2	18.40
2515F2	77.90	41.28	38.50	19.05	103.0	60.0	10.0	400.0	420.0	20.28
2814	88.90	44.45	36.60	22.23	117.6	58.0	12.7	471.0	507.6	25.70
3214	103.20	44.45	48.00	22.00	123.5	55.0	13.0	476.0	514.0	23.60
3315	103.45	45.24	49.30	23.85	130.0	63.5	14.2	550.0	594.0	27.71
3618	114.30	57.15	52.30	27.97	138.0	79.2	14.2	760.0	820.8	41.20
4020	127.00	63.50	69.90	31.78	165.7	88.9	15.7	987.0	1069.2	48.60
2184	152.40	76.20	35.00	22.20	96.0	51.0	9.5	330.0	378.0	18.17
MXS882	66.27	22.23	28.58	11.10	68.5	28.5	6.4	115.6	124.8	5.30
MXS3075	78.10	31.75	38.10	16.46	93.5	44.5	9.7	334.0	360.7	13.45
MXS1242	103.20	44.45	49.20	22.23	124.5	57.0	12.8	623.0	672.8	24.63
SS588	66.27	22.23	28.60	11.11	63.7	28.6	6.3	130.0	144.0	5.46
SS568H	77.90	41.30	39.70	19.05	97.6	57.0	9.5	340.0	367.3	19.80
SS40H(P)	78.11	31.75	38.10	15.88	97.0	41.5	9.5	250.0	280.0	12.60
SS124	103.20	44.45	49.20	22.23	127.2	57.0	12.7	560.0	590.0	22.57