


钢制焊接弯板链

STEEL WELDED TYPE CRANKED LINK CHAIN

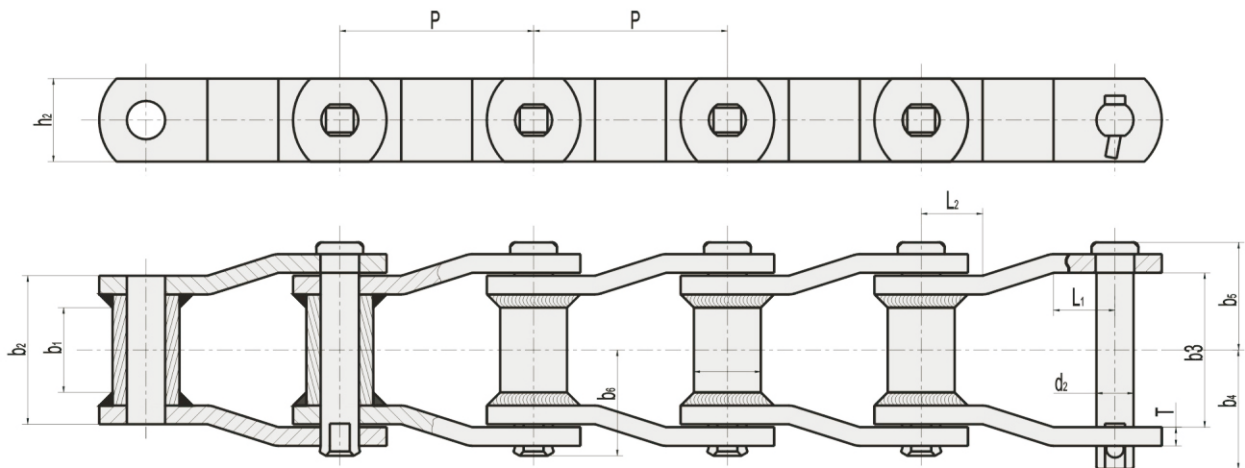

YHK Chain No.	节距 Pitch	套筒外径 Bush diameter	链节小端内宽 Inner width of small side	销轴直径 Pin diameter	套筒内径 Bush inner diameter	链板高度 Plate thickness	链板弯部尺寸 Crack point dimension	
	P	d ₁ max	b ₁ min	d ₂ max	d ₃ max	h ₂ max	L ₁ min	L ₂ min
	mm	mm	mm	mm	mm	mm	mm	mm
W78	66.27	22.9	28.4	12.78	12.90	28.4	17.0	17.0
W82	78.1	31.5	31.8	14.35	14.48	31.8	19.8	21.1
W106	152.4	37.1	41.2	19.13	19.25	38.1	26.7	27.2
W110	152.4	32.0	46.7	19.13	19.25	38.1	26.7	27.2
W111	120.9	37.1	57.2	19.13	19.25	38.1	26.7	27.2
W124	101.6	37.1	41.2	19.13	19.25	38.1	26.7	27.2
W124H	103.2	41.7	41.2	22.30	22.43	50.8	28.2	30.5
W132	153.67	44.7	76.2	25.48	25.60	50.8	30.0	30.5

YHK Chain No.	链节 小端外宽 Outer width of small side	链节 大端内宽 Inner width of big side	销轴锁止端 至中线距离 Distance between pin lach end and middleline	销轴头端 至中线距离 Distance between pin top end and middleline	销轴铆端 至中线距离 Distance between rivet end and middleline	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	
	b ₂ max	b ₃ min	b ₄ max	b ₅ max	b ₆ max	T	Q(min) kN	
	mm	mm	mm	mm	mm	mm	销轴热处理 Pin heat treatment	全部热处理 All parts heat treatment
W78	51.0	51.6	45.2	39.6	42.7	6.4	93.4	106.8
W82	57.4	57.9	48.3	41.7	45.2	6.4	100.1	131.2
W106	71.6	72.1	62.2	56.4	59.4	9.7	169.0	224.6
W110	76.5	77.0	62.2	54.9	59.4	9.7	169.0	224.6
W111	85.9	86.4	69.8	63.5	64.3	9.7	169.0	224.6
W124	71.6	72.1	62.0	56.4	59.4	9.7	169.0	224.6
W124H	76.5	77.0	70.6	62.5	65.8	12.7	275.8	355.9
W132	111.8	112.3	88.1	79.2	83.3	12.7	275.8	378.1